




AN HSIN

安心自吸式離心泵浦

SELF PRIMING CENTRIFUGAL PUMP

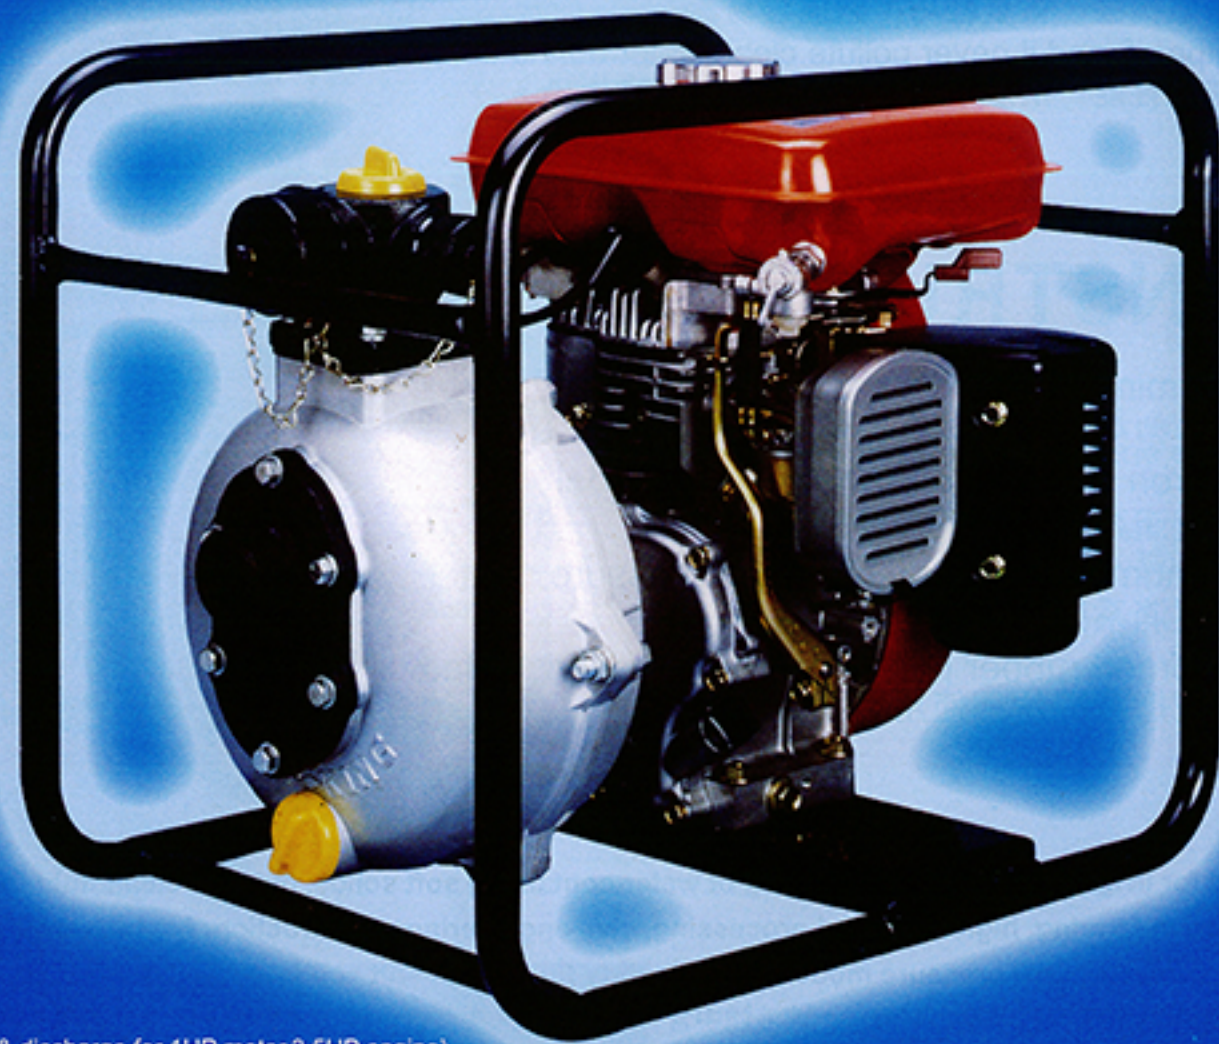

PK-380L
(1 1/2" suction & discharge, for 1HP motor, 3.5HP engine)
(吸水及出水口徑 1 1/2" · 適用 1HP 馬達或 3.5HP 引擎)

PK-380H
(1 1/2" suction & discharge, for 3HP motor, 5HP engine)
(吸水及出水口徑 1 1/2" · 適用 3HP 馬達或 5HP 引擎)

PK-500L
(2" suction & discharge, for 2HP motor, 3.5HP engine)
(吸水及出水口徑 2" · 適用 2HP 馬達或 3.5HP 引擎)

PK-500H
(2" suction & discharge, for 5HP motor, 7HP engine)
(吸水及出水口徑 2" · 適用 5HP 馬達或 7HP 引擎)

PK-380H 2S
(1 1/2" suction & discharge, for 4HP motor, 5.5HP engine)
(吸水及出水口徑 1 1/2" · 適用 4HP 馬達或 5.5HP 引擎)

PK-760L
(3" suction & discharge, for 3HP motor, 5HP engine)
(吸水及出水口徑 3" · 適用 3HP 馬達或 5HP 引擎)

■ Low pressure model number suffixed with "L" for pumping dirty fluids.
型號字尾 "L" 屬低壓泵浦系列 · 適合髒液體之輸送。


■ High pressure model number suffixed with "H" for pumping clean fluids.
型號字尾 "H" 屬高壓泵浦系列 · 適合清潔液體之輸送。

DIRECT OR BELT DRIVE FROM MOTOR

引擎或馬達傳動 **OR ENGINE**



Adaptable to electric motor.
Suited to fit with 2 pole motor only.
以馬達傳動，馬達須為2極。

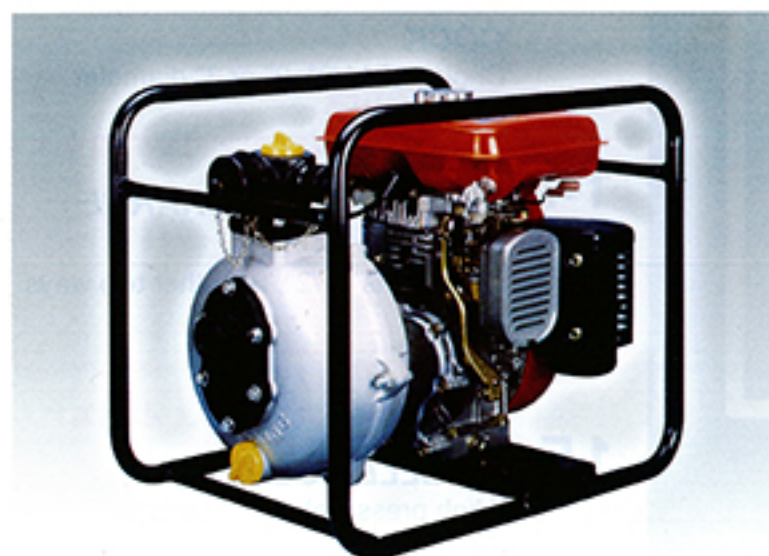


Adaptable to gasoline or diesel engine. Suited for "U" or "P" type high speed engine with RPM over 3600.
以汽油或柴油引擎傳動。引擎機型為 "U" 或 "P" 型高速引擎，轉速須超過 3600RPM。



With pulley for V-belt drive.
Pulley groove as per customer specified.
裝置皮帶輪，以皮帶傳動。皮帶輪槽規格可由客戶指定。

特性曲線 Characteristic Curve

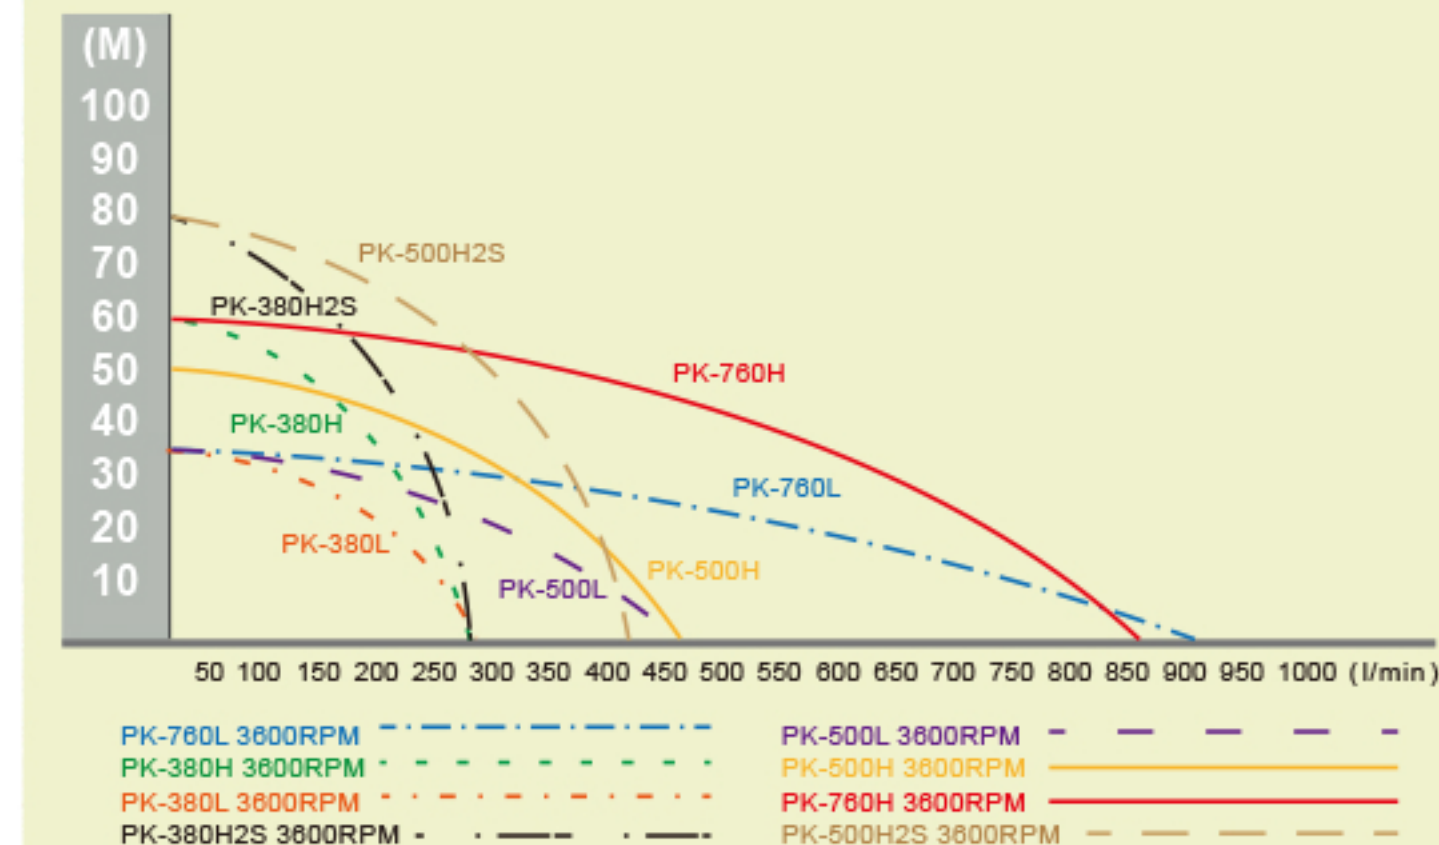

規格 Specifications:

型號	MODEL	PK-380L	PK-380H	PK-500L	PK-500H	PK-760L	PK-380H-2S
吸水及出水口徑	Suction & discharge port	ø1 1/2"	ø1 1/2"	ø2"	ø2"	ø3"	ø1 1/2"
最大揚程(M)	Maximum lift (M)	35	60	35	50	35	80
最大流量(L/每分鐘)	Maximum delivery volume (L/MIN)	280	270	460	460	900	270
最大自吸高度(M)	Maximum height of self priming(M)	8	8	8	8	8	8
工作轉速(RPM)	Working speed(RPM)	3600	3600	3600	3600	3600	3600
適用馬達馬力(HP)	Suited for Motor horsepower(HP)	1	3	2	5	3	4
適用引擎馬力(HP)	Suited for engine horsepower(HP)	3.5	5	3.5	7	5	5.5
重量(Kgs)	Weight(Kgs)	10.5	10.5	10.5	10.5	10.5	10.5
包裝(Cuft)	Packing volume(Cuft)	1.3	1.3	1.3	1.3	1.3	1.3



AN HSIN ENTERPRISE CO.,LTD

NO. 100, Lane 123, She Pi Road, She Pi Li, Feng Yuan City, Taichung Hsien, TAIWAN, R.O.C.
Email: anhsin@ms10.hinet.net Http://www.anhsin.com.tw
TEL: 04-25322384 · 25324384 · 25328827 FAX: 04-25328828
P.O. BOX 78 FENG YUAN, TAICHUNG, TAIWAN, R.O.C.

FEATURES 特性:

- Extremely heavy pump casing that enable the high pressure unit well suited for high pressure pumping operation.
外殼結構剛強、堅韌，適合高壓輸送（高壓型）。
- Self priming feature, filling water is required only at the initial start.
使用方便，只需第一次灌水即可。
- Advanced design offer highly efficient pumping performance.
精心設計，高效率。
- It provides bigger capacity than the others at the same horsepower condition.
相同傳動馬力條件下，輸送量比同級機種輸送量更大。
- Quiet running, Long service life.
運轉寂靜，使用壽命長。
- Durable, light in weight, easy to move.
各部結構強，重量輕巧，搬運容易。
- Rustproof, and it never pollute clean water during delivery.
具防鏽性能，清潔水於輸送過程中不會被污染。

CONSTRUCTION 結構:

- All aluminum alloy die casting casing.
全部機型外殼皆為鋁合金壓鑄成型。
- Cast iron impeller for low pressure model
低壓泵浦系列葉輪採用鑄鐵。
- Aluminum alloy impeller for high pressure model.
高壓泵浦系列葉輪採用鋁合金。
- Reinforced rubber pad for maximum service life.
加強型橡膠墊片，使用壽命長。

Designed for irrigation or general pumping of water containing soft solids, mud, or clean fluid for a versatile application in farming, high rise, food processing, civil engineering, construction, fire prevention and general industries. Low pressure models. Handle dirty fluids with soft solids.


離心泵浦適用灌溉或一般清潔水之輸送，或液體中含有軟質顆粒，泥漿皆可輸送，可廣泛應用於農場、山坡地、食品加工廠、建築工程、防火及其他工業。低壓泵浦系列可輸送含軟質顆粒之污水。



OPTIONAL EQUIPMENT:

特別配件

- 1. FIRE-PROOF SPRAY GUN**
For application in fire prevention, Adjustable head opening for various spray area. 1 1/2" or 2" in diameter for choice.
消防噴槍
適於消防用，噴口為可調式1 1/2"或2"直徑可供選擇。
- 2. FIRE-PROOF CLOTH HOSE**
For fire prevention application, 1 1/2" or 2" in diameter for choice.
消防布管
直徑1 1/2"或2"供選擇。
- 3. CLEANING SPRAY GUN**
For application in washing purpose standard 1 1/2" or 2" in diameter for choice.
清洗噴槍
適用於物品清洗，直徑有1 1/2"或2"供選擇。
- 4. SUCTION STRAINER**
Prevent large particles of mud, sediment or solids from entering suction port.
過濾器
可防止泥漿，或沉渣內之大顆粒進入吸水口。
- 5. PORTABLE HANDLE WITH FOOTING**
A carrier for pump unit which replace a portable frame.
可提式手把附腳粒
用以取代大型框架，使方便提起泵浦。
- 6. COMMON SUCTION DISCHARGE CONNECTOR**
1 1/2" or 2" or 3" diameter for choice.
普通進出水接頭
直徑有1 1/2".2"或3"可選擇。

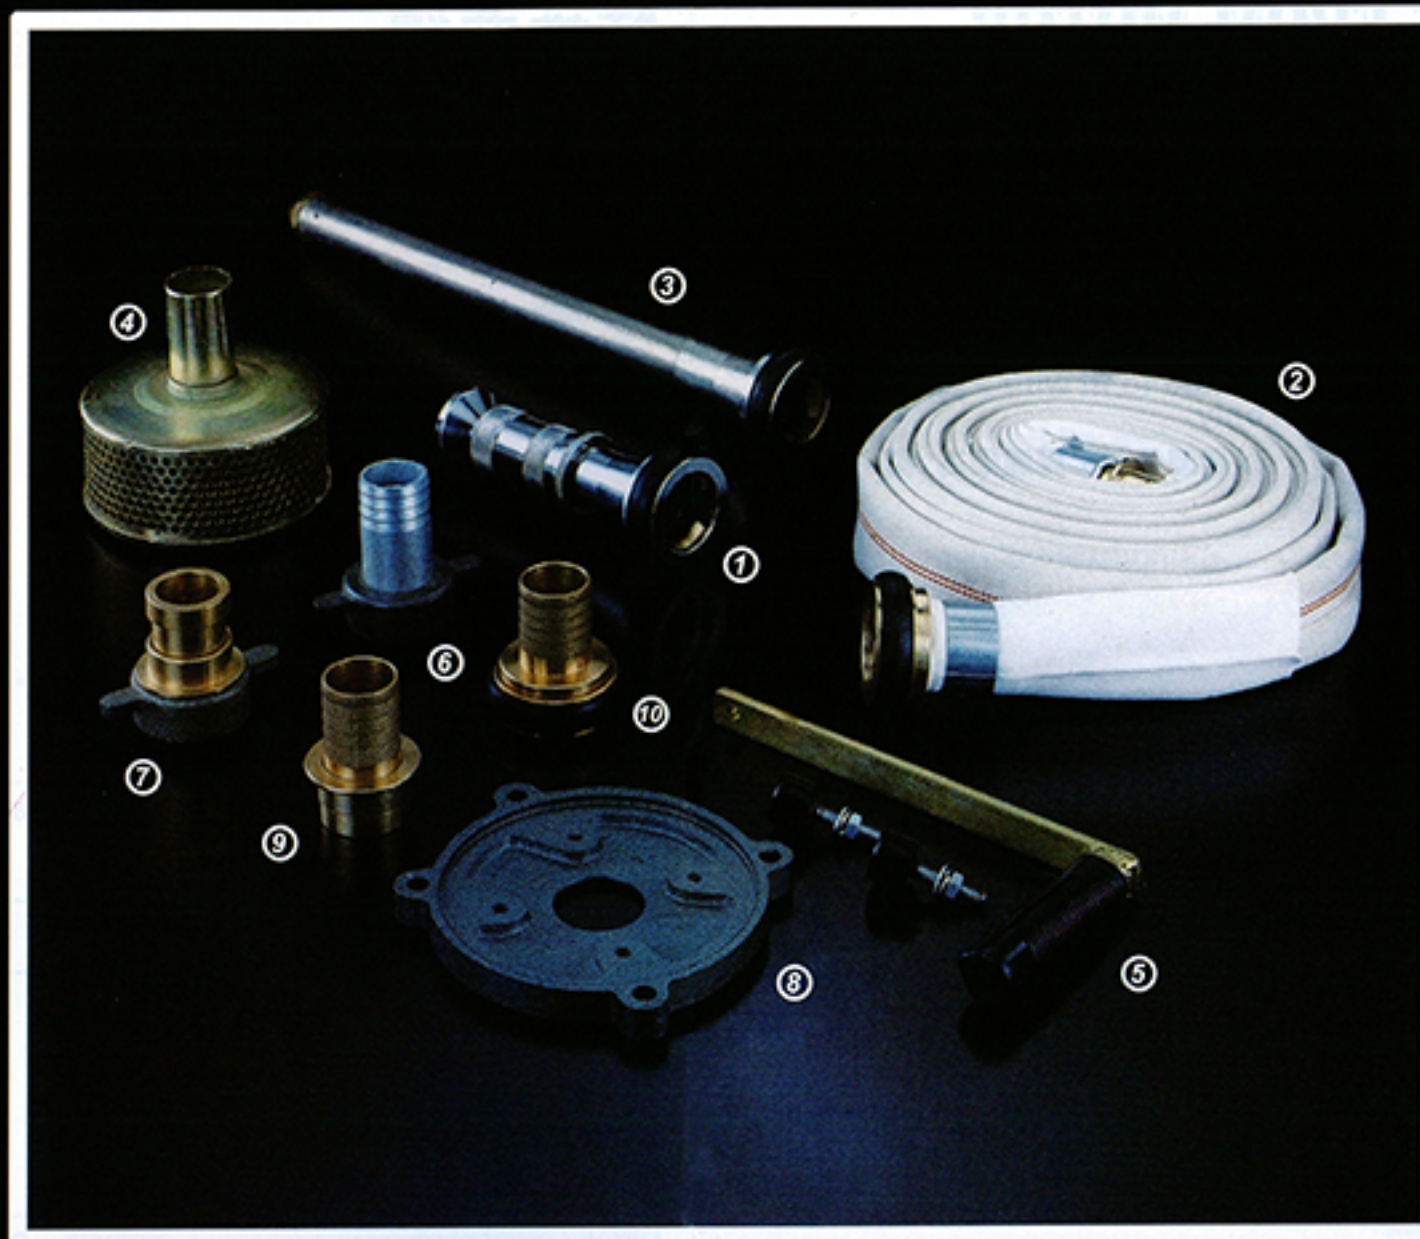

- 7. QUICK DISCHARGE CONNECTOR**
1 1/2" Or 2" Diameter For Choice.
快速出水接頭
直徑有1 1/2"或2"可選擇。
- 8. FLANGE**
For fit with engine horsepower bigger than 7HP, on which pump mounting hole standard distance predrilled is 65.1mm(2 9/16").
鑄鐵法蘭
引擎馬力超過 7HP時，因其標準安裝孔距離為 65.1mm(29/16")，故須用此法蘭才可安裝。
- 9. QUICK COUPLING HOSE CONNECTOR ASSEMBLY QUICK CONNECTOR(MALE)**
Particularly suited for fire prevention. 1 1/2" or 2" diameter for choice.
快速接頭組(公)
針對於防火系統用。直徑有1 1/2"或2"可選擇。
- 10. QUICK CONNECTOR(FEMALE)**
快速接頭(母)

Standard Accessories: 標準配件

- 11. LOW PRESSURE IMPELLER**
Built in low pressure model of pump. Keyway or threaded bore. Specify bore size when ordering.
低壓葉片
葉片內孔有鍵槽式及螺紋式。訂購時請指明內孔尺寸。
- 12. HIGH PRESSURE IMPELLER**
Built in high pressure model of pump. Keyway or threaded bore. Specify bore size when ordering.
高壓葉片
葉片內孔有鍵槽式及螺紋式。訂購時請指明內孔尺寸。
- 13. SINGLE WAY DISCHARGE COCK**
Choice of 1 1/2", 2" or 3" diameter.
單向出水頭
單向出水頭，有1 1/2".2"或3"供選擇。
- 14. THREE WAY DISCHARGE COCK**
One way is 1 1/2", the other two ways are 1".
三向出水頭
三向出水頭，1向為1 1/2"，另2向為1"。
- 15. IMPELLER COVER (High pressure)**
葉片蓋 葉片蓋(高壓)
- 16. IMPELLER COVER (Low pressure)**
葉片蓋 葉片蓋(低壓)

